



Akustikanlagen nach EN 54 –16  
Uhrenanlagen, analog und digital  
Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16  
Horloges analogiques et digitales  
Haut-parleurs


Voice-Alarm according EN 54 –16  
Clock Systems, analogue and digital  
Loudspeaker



g+m elektronik ag  
CH-9245 Oberbüren  
www.gm-elektronik.ch

# Multi-purpose scoreboard GM-117220-00 for Indoor- or Outdoor- (also with radio-remote-control)

Basic Module LED for 10 sports

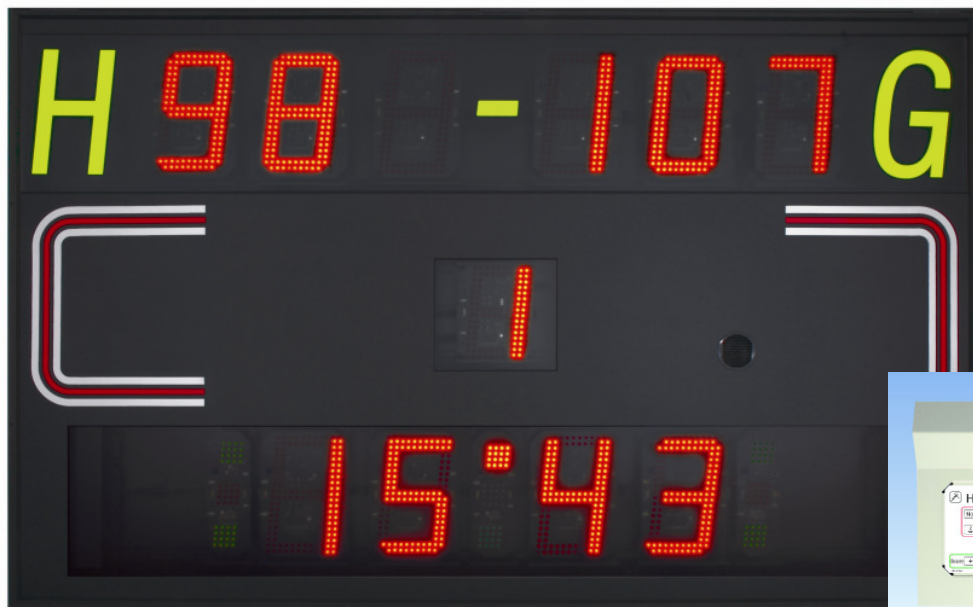

## Function:

- Display shows result, period and time in figures
  - Display shows time-out, break, service and penalty with coloured dots
- Remote-control with Parallel-display (with cable or radio-controlled)

## Design :

- One-side Scoreboard for wall-mounting
- Case aluminium, frontcover protected DIN 18032

Display	Colour	Artikel	Dimensions	Weight	Visibility
result, time, period	red	GM-117220-00	2000x1250x110 mm (B/H/T)	48,0 kg	120 m



Akustikanlagen nach EN 54 –16  
Uhrenanlagen, analog und digital  
Lautsprecher für Beschallungsanlagen

---

Systèmes Audio d'évacuation EN 54 –16  
Horloges analogiques et digitales  
Haut-parleurs

---

Voice-Alarm according EN 54 –16  
Clock Systems, analogue and digital  
Loudspeaker



g+m elektronik ag  
CH-9245 Oberbüren  
www.gm-elektronik.ch

## Function:

**Match/Game time:** Count-up or down is indicated by four digits (minutes and seconds)

**Game stopped:** Indicated by green/red dot

**Score indication:** 000-999 (three digits per team)

**Period:** 1-9 (1 digit)

**Penalty/Serve/Foul:** Indicated by dots

**Time-Out:** By two yellow dots per team

**Fixed characters:** **H** (home team) and **G** (guests)

**Siren:** built-in. Sounds automatically at finished game, time-out and break/pause. By manually pressing a key, the siren can also sound at any requested time

**Front cover:** Non-reflective polycarbonate (DIN 18032)

## Technical data:

**Case:** Aluminium profile

**Digits:** LED's

**Digit height:** score and time 250 mm, period 190 mm, red

**Dimensions:** 2000 x 1250 x 110 mm (W/H/D), weight 48 kg

**Visibility:** approx. 120 meters

**Conn. voltage:** 230 VAC, consumption 80 VA

**Ambient temp.:** 0° - +40°

**Siren :** Built in, 117 dB

**Options:**

- Remote-control radio controlled
- Internal illumination
- Local time (daytime)
- Additional modules (penalty, foul)
- Referee-Lamps red/green (Icehockey)