



Akustikanlagen nach EN 54 –16
 Uhrenanlagen, analog und digital
 Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16
 Horloges analogiques et digitales
 Haut-parleurs

Voice-Alarm according EN 54 –16
 Clock Systems, analogue and digital
 Loudspeaker

One sided analogue Slave Clocks with mounting-console for Indoor

Minute Pulse 24-V or Time Code TC – hours – minutes - Ø to 400 mm



Functions :

- Polarised minute impulses from master clock

Design :

- Single sided clock for surface mounting incl. mounting console
- for wall or ceiling mounting, back cover
- Black Arabic or Latin marks on white background, black hours and minutes hand
- Convex protection glass
- Housing ABS plastic or anodised aluminium

Options:

- housing, clock face, hands in different colours (extra charge)
- different clock mechanism for existing systems (12V, 48V, 60V)
- ball protection bars, Polycarbonate-cover

Minute impulse clocks

Ø	white	Aluminium
240 mm	111006-WS-RW	111006-AL-RW
300 mm	111018-WS-RW	111018-AL-RW
400 mm	111030-WS-RW	111030-AL-RW

TC-clocks

Ø	white	Aluminium
240 mm	4023520-90-WS-RW	4023520-90-AL-RW
300 mm	4033520-90-WS-RW	4033520-90-AL-RW
400 mm	4043520-90-WS-RW	4043520-90-AL-RW



Akustikanlagen nach EN 54 –16
 Uhrenanlagen, analog und digital
 Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16
 Horloges analogiques et digitales
 Haut-parleurs


Voice-Alarm according EN 54 –16
 Clock Systems, analogue and digital
 Loudspeaker



g+m elektronik ag
 CH-9245 Oberbüren
 www.gm-elektronik.ch

Technical Data:

Single sided Clocks with mounting console

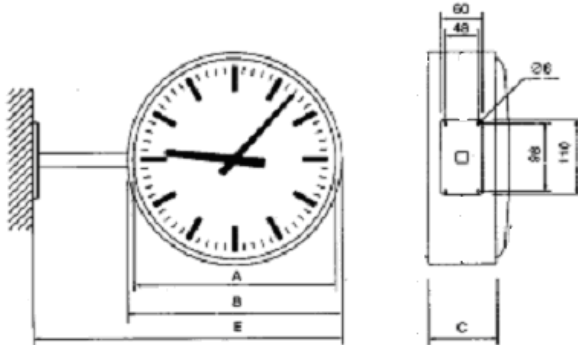

Ø	A	B	C	E	weight	visibility
240	210	232	40	360	1,5 kg	20 m
300	280	305	40	435	1.8 kg	30 m
400	380	405	40	535	2.1 kg	40 m

measure in mm

Specification :

Power consumption : 7.5mA at 24V (single-sided), 15mA at 24V (double-sided)
 Ambient temperature : 0° to +40°
 Relative. humidity : 85%
 Protection norm : IP 52