



Akustikanlagen nach EN 54 –16  
 Uhrenanlagen, analog und digital  
 Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16  
 Horloges analogiques et digitales  
 Haut-parleurs


Voice-Alarm according EN 54 –16  
 Clock Systems, analogue and digital  
 Loudspeaker



g+m elektronik ag  
 CH-9245 Oberbüren  
 www.gm-elektronik.ch

# Analogue Square Slave Clocks for Indoor

Time Code or Minute Pulse 24-V – hours – minutes - to 400 x 400 mm

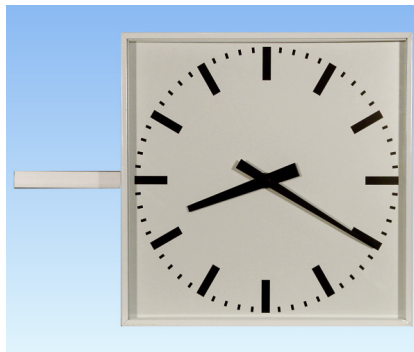

## Functions :

- Polarised minute impulses with Time-Code from Master clock
- The slave clocks will be automatically adjusted with the Time Code signal

## Design :

- Single sided clock for surface mounting incl. surface mounting brackets
- Double sided clock incl. Mounting console for wall or ceiling mounting
- Black Arabic or Latin marks on white background, black hours and minutes hand
- Convex protection glass
- Housing ABS plastic white

## Options:

- housing, clock face, hands in different colours (extra charge)
- different clock mechanism for existing systems (12V, 48V, 60V)
- ball protection bars, Polycarbonate-cover

### Single Sided

Ø	Minute Imp.	Time-Code
240 mm	141006	141006-TC
300 mm	141016	141016-TC
400 mm	141018	141028-TC

### Double Sided

Ø	Minute Imp.	Time-Code
240 mm	141006-DS	141006-DS-TC
300 mm	141016-DS	141016-DS-TC
400 mm	141018-DS	141028-DS-TC



Akustikanlagen nach EN 54 –16  
 Uhrenanlagen, analog und digital  
 Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16  
 Horloges analogiques et digitales  
 Haut-parleurs


Voice-Alarm according EN 54 –16  
 Clock Systems, analogue and digital  
 Loudspeaker



g+m elektronik ag  
 CH-9245 Oberbüren  
 www.gm-elektronik.ch

## Technical Data:


### Single sided Clocks

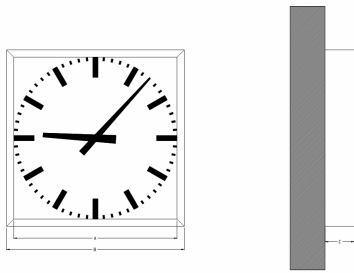

size	A	B	C			weight	visibility
240x240	210	232	50			0,8 kg	20 m
300x300	280	305	50			1,1 kg	30 m
400x400	380	405	50			1.5 kg	40 m

Masse in mm

### Double Sided clocks

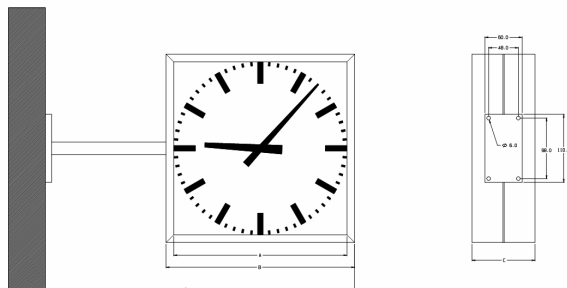

size	Ø	A	B	C	D	E	weight	visibility
240x240	240	210	232	102	102	350	2,0 kg	20 m
300x300	300	280	305	102	102	440	2,6 kg	30 m
400x400	400	380	405	102	102	550	3,4 kg	40 m

Masse in mm

## Spezifikationen :

Power consumption :..... 7.5mA at 24V (single-sided), 15mA at 24V (double-sided)  
 Ambient temperature :..... 0° bis +40°  
 Relative. humidity: ..... 85%  
 Protection norm :..... IP 52

g+m elektronik ag  
 CH-9245 Oberbüren  
 T+ 41 (0)71 955 90 10  
 F+ 41 (0)71 955 90 20

Externe Filialen Schweiz/Regional Swiss Offices:  
 5504 Othmarsingen T +41 (0)62 896 02 08 F +41 (0)62 896 02 68  
 1090 La Croix (Lutry) T +41 (0)21 791 63 06 F +41 (0)21 791 63 08  
 www.gm-elektronik.ch adm@gm-elektronik.ch

Tochterfirmen im Ausland/Subsidiary Companies:  
 g+m elektroakustik GmbH D-64646 Heppenheim  
 g+m électronique S.A.R.L. F-21202 Beaune  
 g+m audio-technologie B.V NL-4824 AT Breda