



Akustikanlagen nach EN 54 –16
Uhrenanlagen, analog und digital
Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16
Horloges analogiques et digitales
Haut-parleurs


Voice-Alarm according EN 54 –16
Clock Systems, analogue and digital
Loudspeaker



g+m elektronik ag
CH-9245 Oberbüren
www.gm-elektronik.ch

Time- / Temperatur-Display for Indoor and Outdoor

Display for Time and Date alternately

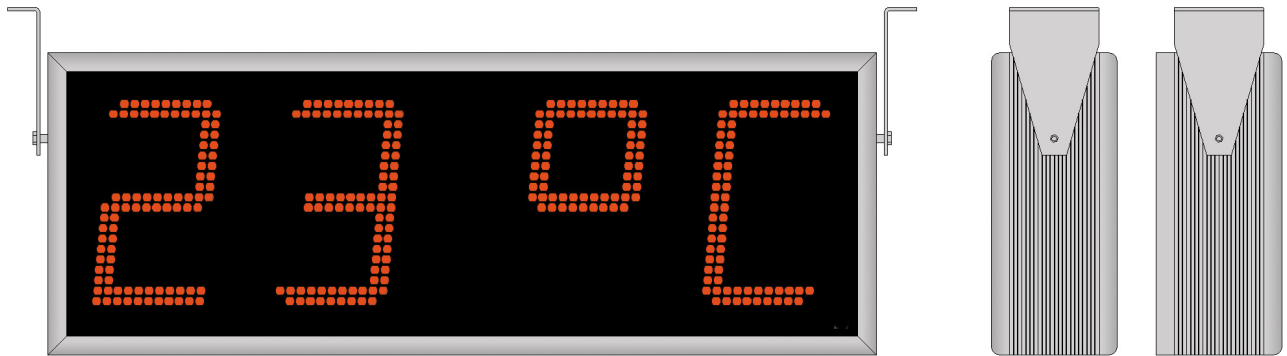

Functions :

- Polarised Minute impulses from master Clock
- Polarised Minute impulses from master Clock with TC (self adjusting)
- Stand alone
- For all functions 230 VAC needed (Display)
- 24 h running reserve (Impulse memory)
- Temperature measurement with external sensor

Design :

- Single sided clock for surface mounting incl. surface mounting brackets
- Double sided clock incl. Mounting console for wall or ceiling mounting
- Display hours and minutes with double LED's 140 mm (190 mm, 250mm)
- housing aluminium

Options :

- Radio Synchronisation DCF, GM-2022, operated as stand alone
- Time- Code-add on (SM-TC) operated as a self adjusted slave clock

Display	Mounting	Article	Dimensions	Weight	Visibility
Hrs., Min., Temp. 140 mm	Indoor	114500-00	690x250x155 mm (B/H/T)	7,5 kg	50 m
Hrs., Min., Temp. 190 mm	Indoor	114502-00	820x300x155 mm (B/H/T)	9,5 kg	65 m
Hrs., Min., Temp. 250 mm	Indoor	114504-00	1020x370x155 mm (B/H/T)	12,0 kg	80 m
Hrs., Min., Temp. 140 mm	Outdoor	114510-00	690x250x155 mm (B/H/T)	7,5 kg	50 m
Hrs., Min., Temp. 190 mm	Outdoor	114512-00	820x300x155 mm (B/H/T)	9,5 kg	65 m
Hrs., Min., Temp. 250 mm	Outdoor	114514-00	1020x370x155 mm (B/H/T)	12,0 kg	80 m