



Akustikanlagen nach EN 54 –16  
 Uhrenanlagen, analog und digital  
 Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16  
 Horloges analogiques et digitales  
 Haut-parleurs

Voice-Alarm according EN 54 –16  
 Clock Systems, analogue and digital  
 Loudspeaker

# NTP clocks (Power over Ethernet) for Indoor

NTP clocks PoE – hours – minutes - Ø to 400 mm



## Functions :

- NTP synchronisation from LAN or from g+m Master clock with LAN-extension
- Power for clock with Power over Ethernet (PoE)
- The slave clocks will be automatically adjusted with the LAN-synchronisation

## Design :

- Single sided clock for surface mounting incl. surface mounting brackets
- Double sided clock incl. Mounting console for wall or ceiling mounting
- Black Arabic or Latin marks on white background, black hours and minutes hand
- Convex protection glass
- Housing ABS plastic white

## Options:

- ball protection bars, Polycarbonate-cover
- second hand
- housing, clock face, hands in different colours (extra charge)

### Single Sided

Ø	white	+ seconds hand
240 mm	4023499-90-WS	4023496-90-WS
300 mm	4033499-90-WS	4033496-90-WS
400 mm	4043499-90-WS	4043496-90-WS

### Double Sided

Ø	white	+ seconds hand
240 mm	4423499-WS-DS	4423496-WS-DS
300 mm	4433499-WS-DS	4433496-WS-DS
400 mm	4443499-WS-DS	4443496-WS-DS



Akustikanlagen nach EN 54 –16  
 Uhrenanlagen, analog und digital  
 Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16  
 Horloges analogiques et digitales  
 Haut-parleurs


Voice-Alarm according EN 54 –16  
 Clock Systems, analogue and digital  
 Loudspeaker



g+m elektronik ag  
 CH-9245 Oberbüren  
 www.gm-elektronik.ch

## Technical Data:


### Single sided Clocks

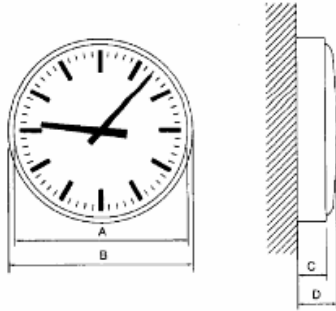

Ø	A	B	C	D	weight	visibility
240	210	232	36	45	0,8 kg	20 m
300	280	305	36	45	1,1 kg	30 m
400	380	405	36	45	1.5 kg	40 m

measure in mm

### Double Sided clocks

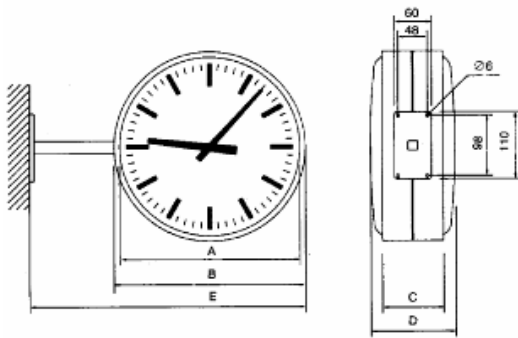

Ø	A	B	C	D	E	weight	visibility
240	210	232	74	92	350	2,0 kg	20 m
300	280	305	74	92	425	2,6 kg	30 m
400	380	405	74	92	525	3,4 kg	40 m

measure in mm

## Specification:

Ambient temperature :..... 0° to +40°  
 Relative. humidity : ..... 85%  
 Protection norm :..... IP 52

g+m elektronik ag  
 CH-9245 Oberbüren  
 T+ 41 (0)71 955 90 10  
 F+ 41 (0)71 955 90 20

Externe Filialen Schweiz/Regional Swiss Offices:  
 5504 Othmarsingen T +41 (0)62 896 02 08 F +41 (0)62 896 02 68  
 1090 La Croix (Lutry) T +41 (0)21 791 63 06 F +41 (0)21 791 63 08  
 www.gm-elektronik.ch adm@gm-elektronik.ch

Tochterfirmen im Ausland/Subsidiary Companies:  
 g+m elektroakustik GmbH D-64646 Heppenheim  
 g+m électronique S.A.R.L. F-21202 Beaune  
 g+m audio-technologie B.V NL-4824 AT Breda