



Akustikanlagen nach EN 54 –16
Uhrenanlagen, analog und digital
Lautsprecher für Beschallungsanlagen

Systèmes Audio d'évacuation EN 54 –16
Horloges analogiques et digitales
Haut-parleurs


Voice-Alarm according EN 54 –16
Clock Systems, analogue and digital
Loudspeaker



g+m elektronik ag
CH-9245 Oberbüren
www.gm-elektronik.ch

Digital Clocks Lumex 15/19/25/30/45 for Indoor

Minute Pulse 24-V – 230 VAC – Hours – Minutes

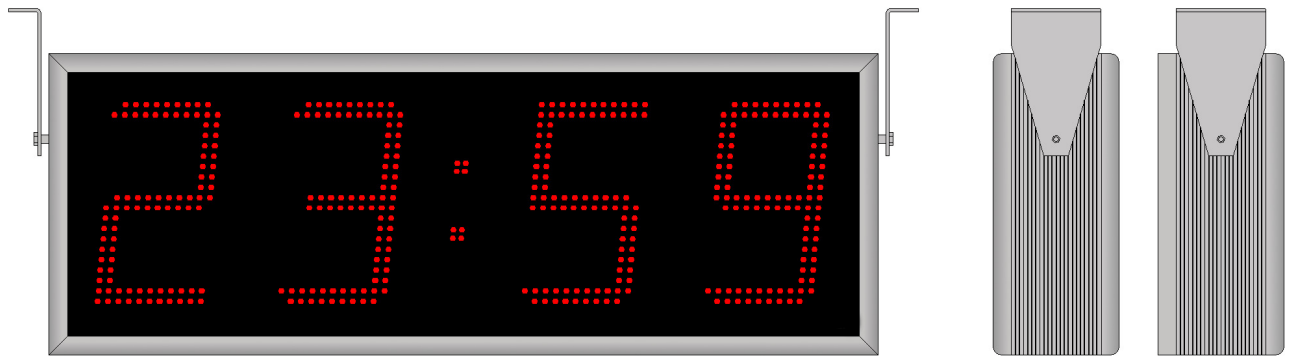

Lumex-15

Functions :

- Polarised Minute impulses from master Clock
- Polarised Minute impulses from master Clock with TC (self adjusting)
- Stand alone
- For all functions 230 VAC needed (Display)
- 48 running reserve (Impulse memory)

Design :

- Single sided clock for surface mounting incl. surface mounting brackets
- Double sided clock incl. Mounting console for wall or ceiling mounting
- Display hours and minutes with LED 140mm (190mm, 250mm)
- housing aluminium

Options :

- Radio Synchronisation DCF, GM-2022, operated as stand alone
- Temp.-sensor – add on (119497-809 operated as a Temperature Display)

Single sided, Display red

Display	Article	Dimension	visibility
Hrs., Min.	Lumex-15	690x250x155 mm (WH/D)	50 m
Hrs., Min.	Lumex-19	820x300x155 mm (WH/D)	65 m
Hrs., Min..	Lumex-25	1020x370x155 mm (WH/D)	80 m
Hrs., Min..	Lumex-30	on demand	
Hrs., Min..	Lumex-45	on demand	