

**Einbau-Lautsprecher    Inbouw-luidspreker**  
**Haut-parleur à encastrer    Build in loudspeaker**

**GM-3320**  
**GM-3328**

**Werkzeug:**

- Schraubenzieher Gr.1
- Kreuzschlitz-Schraubenzieher Gr.2
- Abisolier-Werkzeug

**Anschluss:**

- rot = - (0V)
- braun = + (100V)

**Outils:**

- tournevis no.1
- tournevis cruciforme no.2
- pince à dénuder

**Raccordement:**

- rouge = - (0V)
- brun = + (100V)

**gereedschap:**

- schroevendraaier gr.1
- kruiskop-schroevendraaier grootte 2
- striptang

**aansluiting:**


- rood = - (0V)
- bruin = + (100V)

**tools:**


- screwdriver nr.1
- cross-screwdriver nr. 2
- isolation removing tool

**connecting:**

- red = - (0V)
- brown = + (100V)

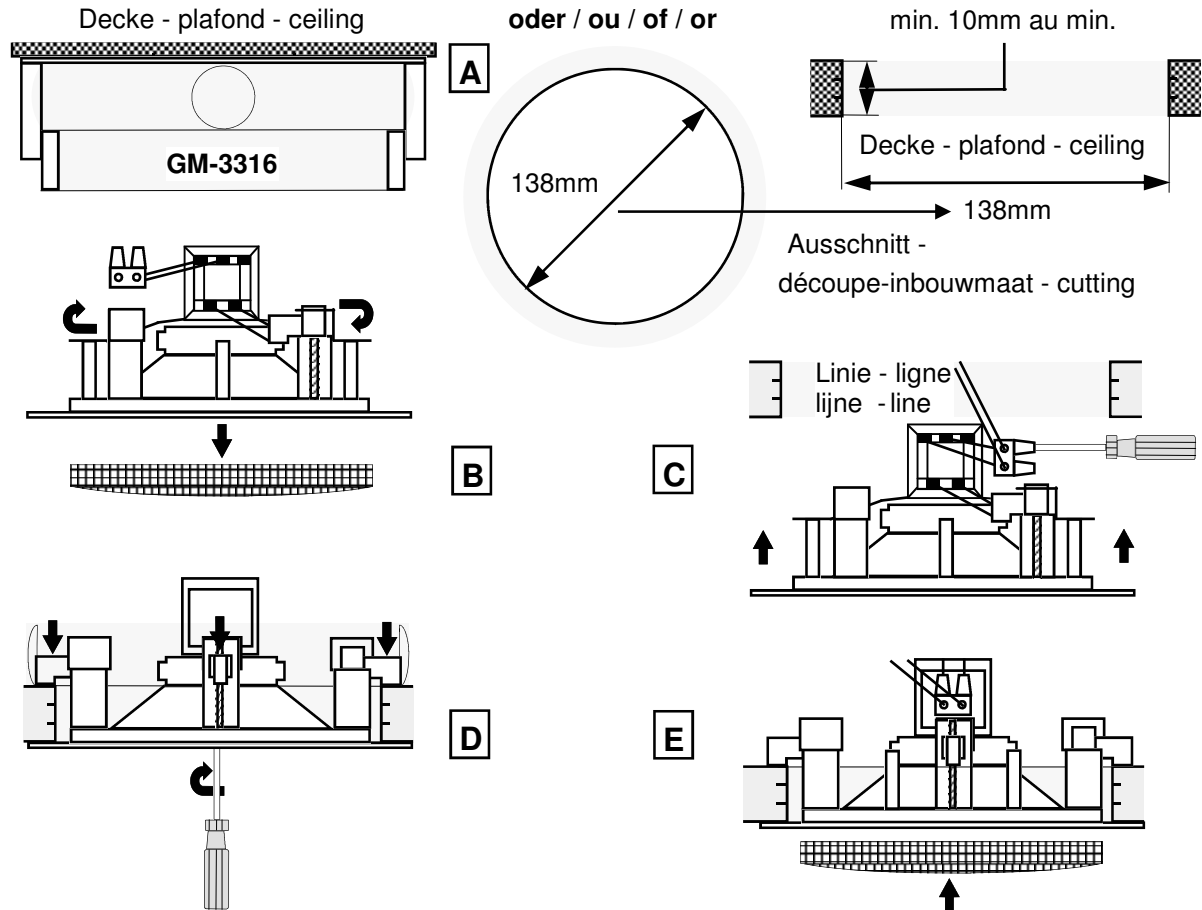

Technische Daten	Caractéristiques techniques	Technische gegevens	Technical specifications
Lautsprecher-System:	Haut-parleur:	Systeem:	Loudspeaker:
Frequenzbereich:	Bande passante:	Frequentiebereik:	Frequency response:
Schalldruck (1W/1m):	Sensibilité (1W à 1m):	Geluidsdruk (1watt/1meter):	Sensitivity (1W at 1m):
Max. Schalldruck (bei 1m):	Niveau sonore maximum (à 1m):	Max. geluidsdruk (1m):	Max. sound level (at 1m):
Anpassung an 100 V:	Adaptation en ligne 100 V:	Aanpassing aan 100 V:	Adaptation on 100 V line:
Impedanz an 100 V:	Impédance sur transformateur:	Transformator impedantie:	Transformer impedance:
Leistung niederohmig:	Puissance efficace maximum:	Vermogen (RMS):	Maximum nominal power:
Impedanz niederohmig:	Impédance directe:	Impedantie excl. trafo:	Nominal impedance:
Abstrahlwinkel bei -6dB:	Angle d'ouverture à -6dB:	Openingshoek (-6dB):	Coverage angle at -6dB:
Dimensionen (Ø / T):	Dimensions (Ø / P):	Afmeting (Ø / D):	Dimensions (Ø / D):
Gewicht:	Poids:	Gewicht:	Weight:
			1-Weg/1voie/1-weg/1way
			200 - 20000 Hz
			93.5 dB
			101 dB
			1.5 / 3 / 6 W
			6666 / 3333 / 1666 Ohm
			8.0 W
			8 Ohm
			170°(h) x 170°(v) @ 1KHz
			168 / 100 mm
			0.6 kg

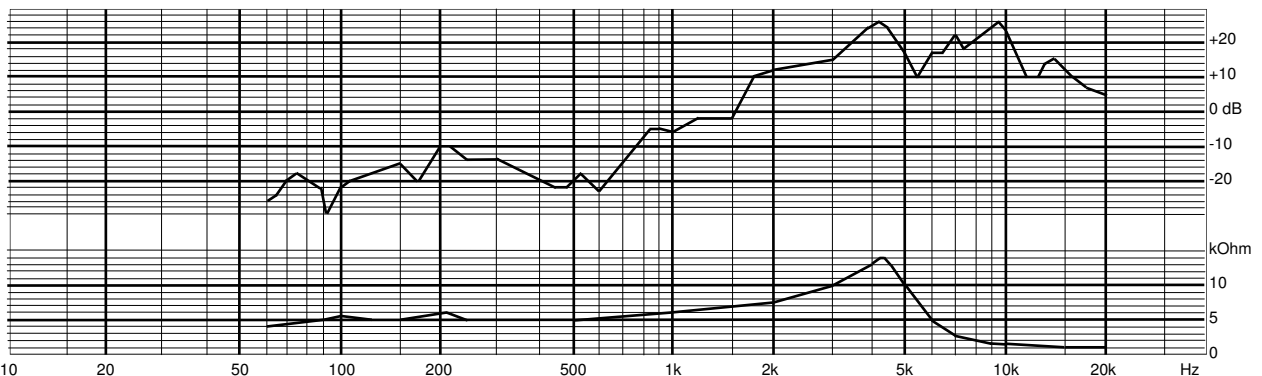

**g+m elektronik ag**  
 CH-9245 Oberbüren  
 T +41 (0)71 955 90 10  
 F +41 (0)71 955 90 20

**Tochterfirmen im Ausland:**  
**g+m** elektroakustik GmbH D-64646 Heppenheim  
**g+m** électronique S.A.R.L. F-21202 Beaune  
**g+m** audio-technologie B.V. NL-4824 AT Breda

