

# GM-3700 + GM-3708 Einbau-Lautsprecher / Ceiling Speaker



## Technische Daten / Technical Specifications

Lautsprecher-System	Loudspeaker	1-Weg / 1-way
Frequenzbereich	Frequency response	110 - 20000 Hz (-10dB)
Schalldruck	Sensitivity	91.0 dB (1W/1m)
Schalldruckpegel SPL	Sound pressure level SPL	
Anpassungen an 100V	Adaptation on 100V line	104.0 dB (20W/1m)
Impedanz an 100V	Transformer impedance	1.5W / <b>3W</b> / 6W
Leistung niederohmig	Maximum nominal power	6667 / <b>3333</b> / 1667 Ohm
Impedanz niederohmig	Nominal impedance	20.0 W
Abstrahlwinkel	Coverage angle	8 Ohm
Abmessungen (BxHxD)	Dimensions (WxHxD)	180°(h) x 180°(v) (-6dB/2KHz)
Gewicht	Weight	180 x 180 x 75 mm

### Werkzeug:


### Tool:

- Screwdriver nr.1
- Cross-screwdriver nr.2
- Isolation removing tool

### Anschluss / Connecting:

black	=	0V
-> rot/red (-)	=	1.5W
yellow	=	1.5W

## Abmessungen und Montage / Dimensions and Fitting

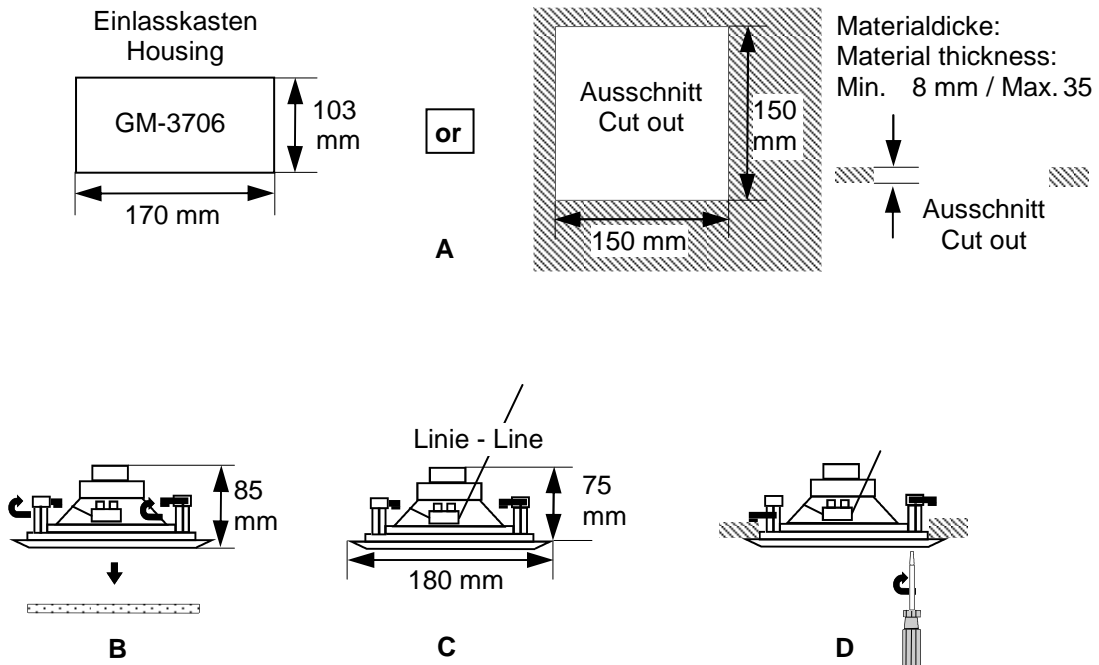

## Kennlinien / Characteristic Diagrams

