


GM-5400-EV Aufbau-Lautsprecher / Cabinet Speaker



Technische Daten / Technical Specifications

Lautsprecher-System	Loudspeaker	1-Weg / 1-way
Frequenzbereich	Frequency response	250 - 13000 Hz (-10dB)
Schalldruck	Sensitivity	89.0 dB (1W/1m)
Schalldruckpegel SPL	Sound pressure level SPL	97.0 dB (@1m)
Anpassungen an 100V	Adaptation on 100V line	1.5W / 3W / 6W
Impedanz an 100V	Transformer impedance	6667 / 3333 / 1667 Ohm
Leistung niederohmig	Maximum nominal power	9.0 W
Impedanz niederohmig	Nominal impedance	8 Ohm
Abstrahlwinkel	Coverage angle	170°(h) x 170°(v) (-6dB/1KHz)
Abmessungen (BxHxD)	Dimensions (WxHxD)	110 x 200 x 70 mm
Gewicht	Weight	1.2 kg
Werkzeug:	Tool:	Anschluss / Connecting:
	- Screwdriver nr.1	schwarz/black =
	- Screwdriver nr.4	0V
	- Isolation removing tool	Sicherung/Fuse = 100V

Abmessungen und Montage / Dimensions and Fitting

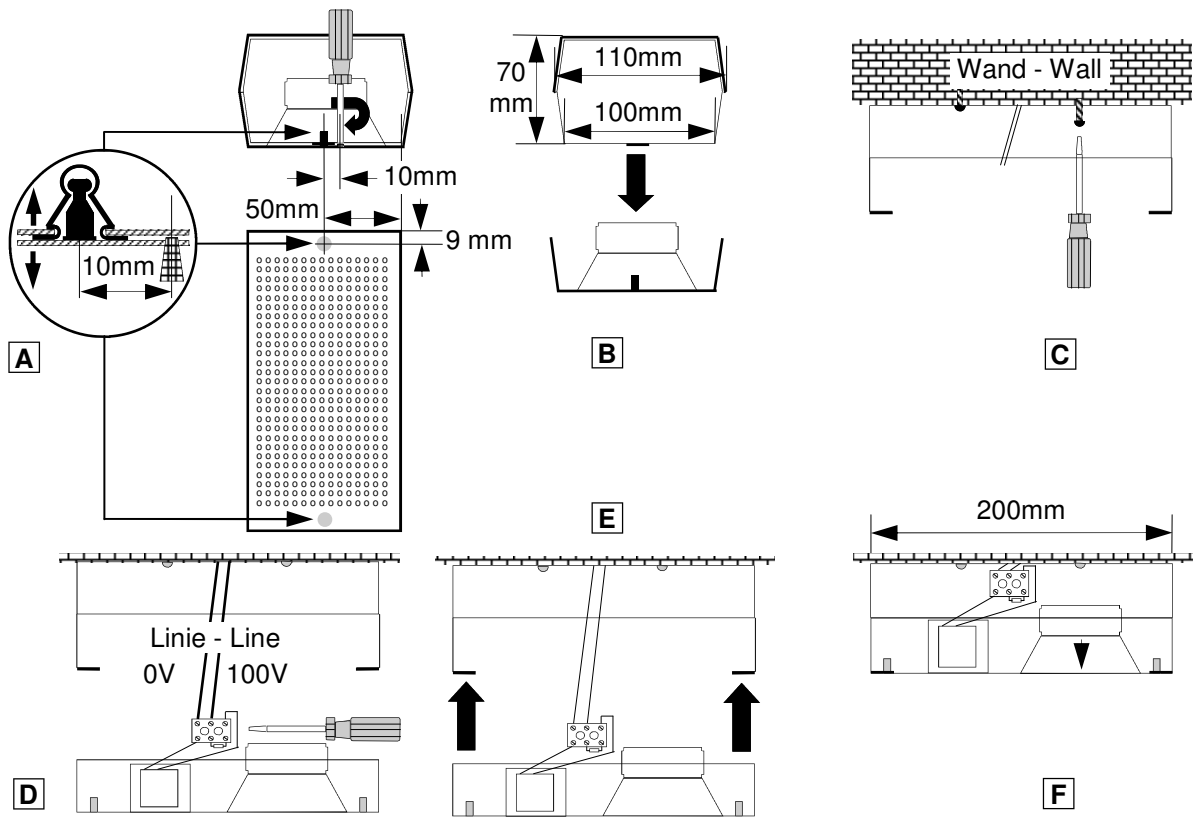

Kennlinien / Characteristic Diagrams

