

**swiss made**  **elektronik ag**



# Catalogus

## Hoornluidsprekers

2012 / 1

**g+m elektronik ag**  
CH-9245 Oberbüren  
T +41 (0)71 955 90 10  
F +41 (0)71 955 90 20

**Regional Swiss Offices:**  
5504 Othmarsingen T +41 (0)62 896 02 08 F +41 (0)62 896 02 68  
1090 La Croix (Lutry) T +41 (0)21 791 63 06 F +41 (0)21 791 63 08  
[www.gm-elektronik.ch](http://www.gm-elektronik.ch) [adm@gm-elektronik.ch](mailto:adm@gm-elektronik.ch)

**Subsidiary Companies abroad:**  
**g+m elektroakustik GmbH** D-64646 Heppenheim  
**g+m électronique S.A.R.L.** F-21202 Beaune  
**g+m audio-technologie B.V.** NL-4824 AT Breda

## Inhoudsopgave

	rond	vierkant	metaal	kunststof	weersbest.	ontruiming	
GM-8615		•		•	•	•	3
GM-8617	•			•	•	•	3
GM-8632		•		•	•	•	4
HP-20-T	•			•	•	•	4

Hoornluidsprekers



accessoires

## GM-8615



### Technische gegevens

Systeem : 1-weg  
 Frequentiebereik : 350 - 4'500 Hz  
 Geluidsdruk (1W / 1m) : 104 dB  
 Max. geluidsdruk (1m) : 116 dB  
 Aanpassing aan 100 V : 15 / 8 / 4 / 2 W  
 Transformator impedantie : 670 / 1250 / 2500 / 5000 Ohm  
 Vermogen (RMS) : 15.0 W  
 Openingshoek -6dB/1kHz : 100° (v) x 60° (h)  
 Afmeting (B x H x D) : 290 x 127 x 255 mm  
 Gewicht : 1.8 kg

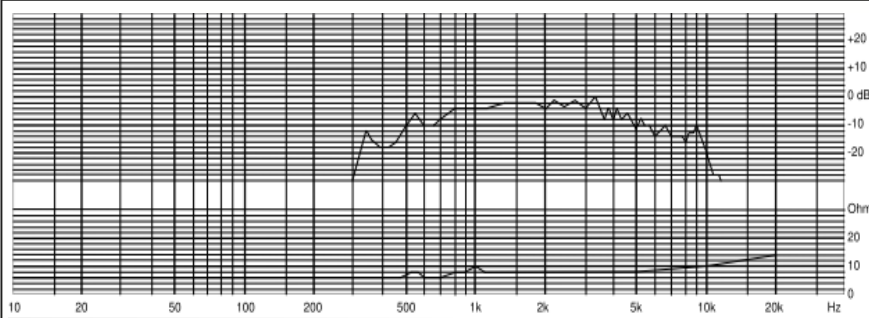



## GM-8617



### Technical specification

Systeem : 1-weg  
 Frequentiebereik : 500 - 5'5000 Hz  
 Geluidsdruk 1W at 1m) : 108 dB  
 Max. geluidsdruk (at 1m) : 119 dB  
 Aanpassing aan 100 V : 15 / **7.5** / 3.75 / 1.9 W  
 Transformator impedantie : 670 / **1333** / 2667 / 5332 Ohm  
 Vermogen (RMS) : 15.0 W  
 Openingshoek -6dB/1kHz : 120°  
 Afmeting (Ø / D) : 210 / 275 mm  
 Gewicht :: 2.0 kg

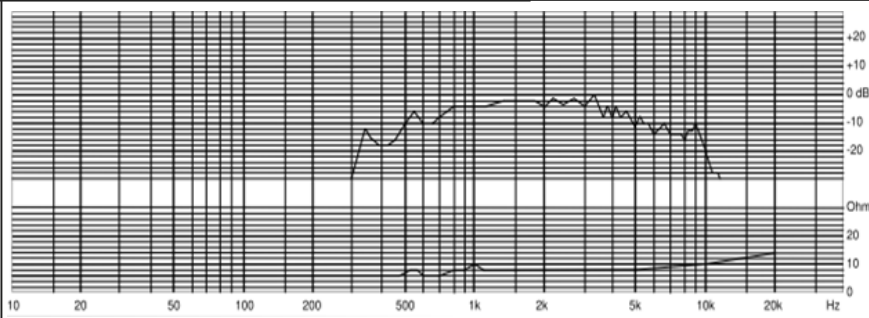



## GM-8632



### Technical specification

System : 1-weg  
 Frequentiebereik : 180 - 7'000 Hz  
 Geluidsdruk 1W / 1m) : 113 dB  
 Max. geluidsdruk (1m) : 123 dB  
 Aanpassing aan 100 V : 40 / 35 / 20 / 10 W  
 Transformator impedantie : 250 / 333 / 500 / 1000 Ohm  
 Vermogen (RMS) : 40.0 W  
 Openingshoek -6dB/1kHz : 100° (v) x 45° (h)  
 Afmeting (W x H x D) : 400 x 200 x 425 mm  
 Gewicht : 3.9 kg

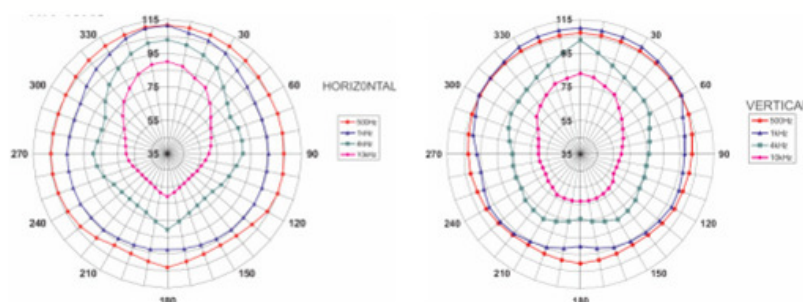

## HP-20-T



### Technische gegevens

System : 1-weg  
 Frequentiebereik : 310 - 8'000 Hz  
 Geluidsdruk (1W / 1m) : 110 dB  
 Max. geluidsdruk (1m) : 122 dB  
 Aanpassing aan 100 V : 20/ 10/ 6/ 5/ 2/ 1.5 W  
 Transformator impedantie : 500/ 1000/ 1670/ 2000 5000/ 6670 Ohm  
 Vermogen (RMS) : 25.0 W  
 Openingshoek -6dB/1kHz : 115°  
 Afmeting : (Ø/T) : 237 / 286 mm  
 Gewicht : 2.3 kg

